




★ Eight dual rollers with patented mast adjustment ★

★ Patented flat cable system ★

★ Low access height of 450 mm with cable carriage ★


★ Completely galvanised platform - optimum corrosion protection ★

GEDA® PH Single

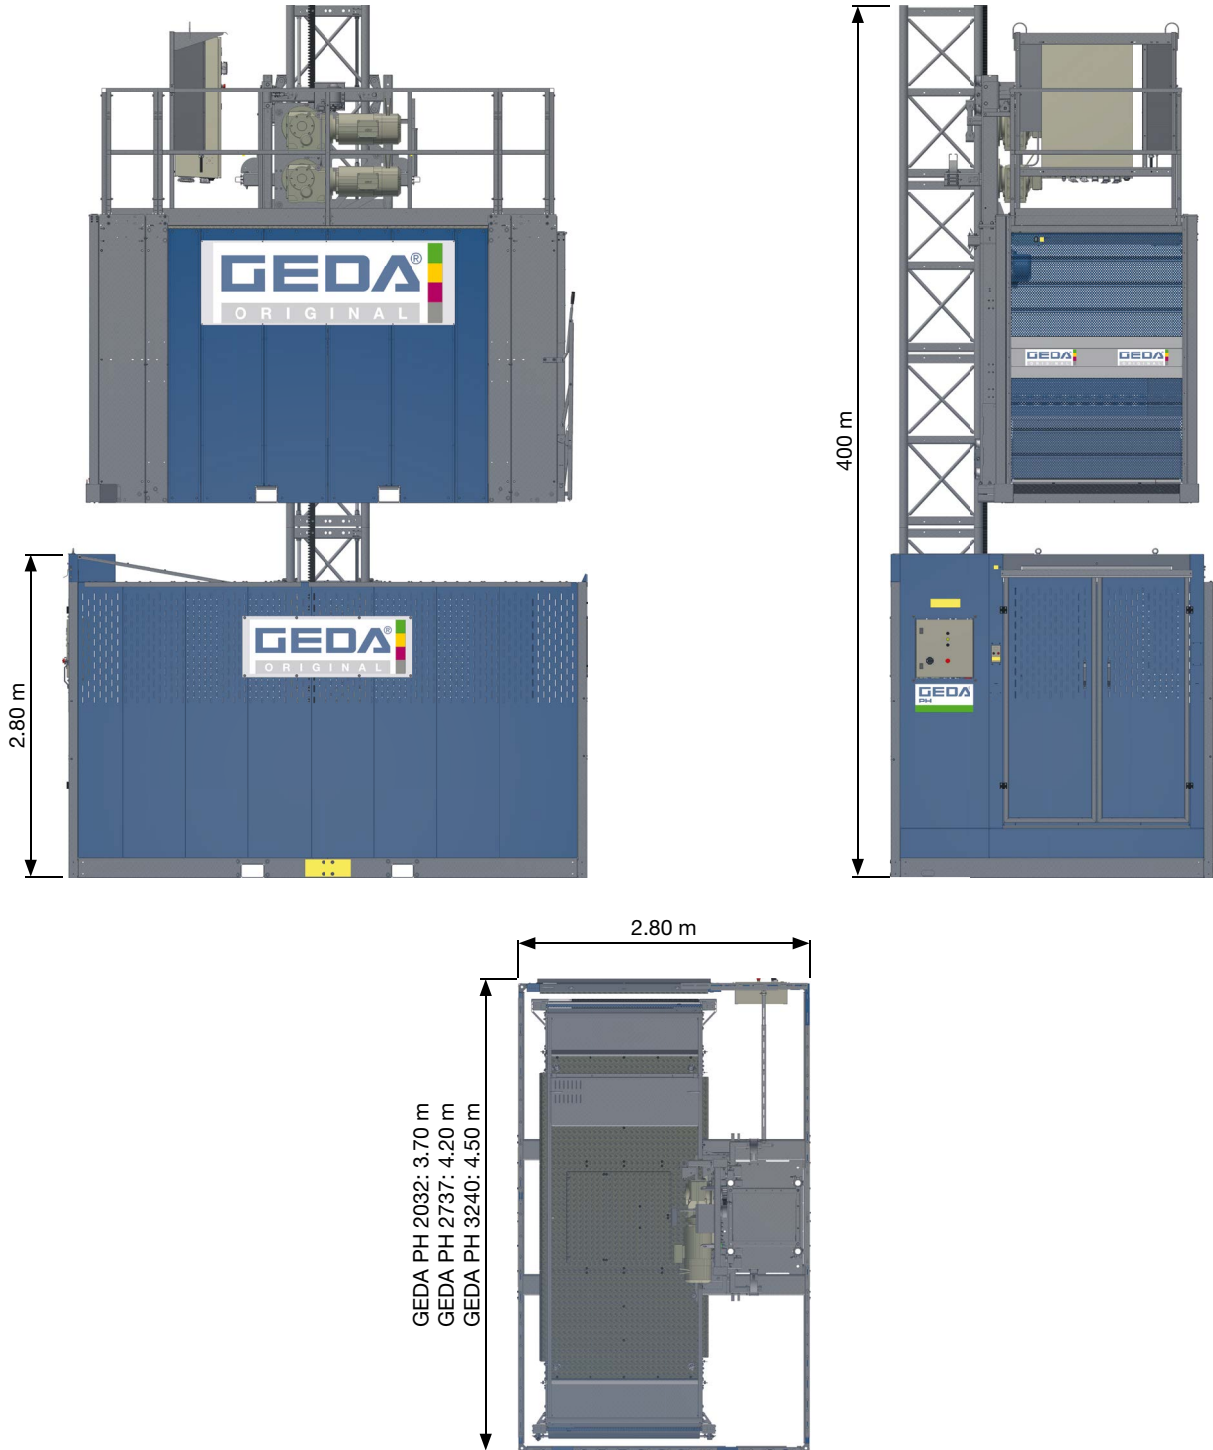

TECHNICAL DATA

	GEDA PH 2032 Single	GEDA PH 2737 Single	GEDA PH 3240 Single
Load capacity	2000 kg/25 persons	2700 kg/28 persons	3200 kg/30 persons
Platform size	1.55 x 3.20 x 2.10 m	1.55 x 3.70 x 2.10 m	1.55 x 4.00 x 2.10 m
Lifting speed	0-40-65-90 m/min	0-40-65-90 m/min	0-40-65-90 m/min
Lifting height	400 m	400 m	400 m
Power supply	35-75 kW/380-480 V/ 50-60 Hz/63-125 A	40-80 kW/380-480 V/ 50-60 Hz/80-160 A	45-80 kW/380-480 V/ 50-60 Hz/80-160 A

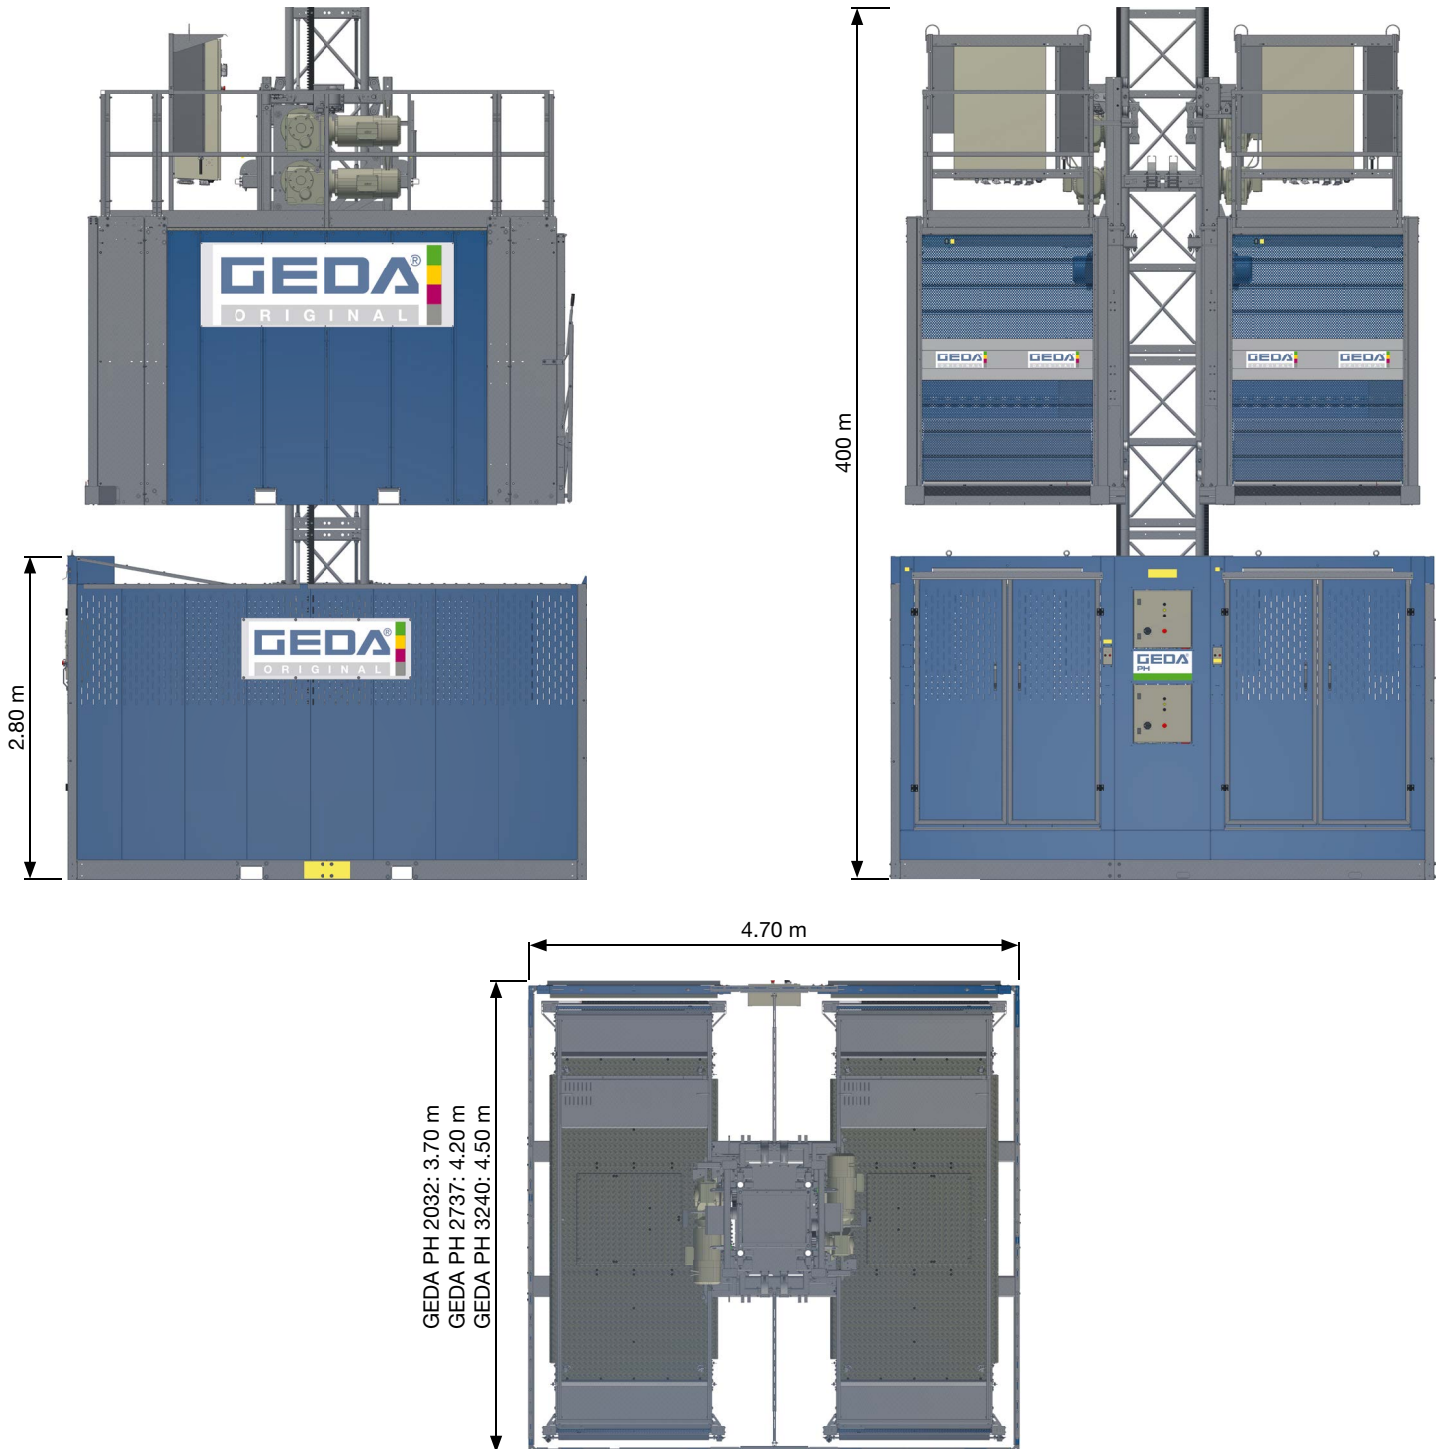

TECHNICAL DATA

	GEDA PH 2032 Twin	GEDA PH 2737 Twin	GEDA PH 3240 Twin
Load capacity	2000 kg/25 persons	2700 kg/28 persons	3200 kg/30 persons
Platform size	1.55 x 3.20 x 2.10 m	1.55 x 3.70 x 2.10 m	1.55 x 4.00 x 2.10 m
Lifting speed	0-40-65-90 m/min	0-40-65-90 m/min	0-40-65-90 m/min
Lifting height	400 m	400 m	400 m
Power supply	2 x 35-75 kW/380-480 V/ 50-60 Hz/2 x 63-125 A	2 x 40-80 kW/380-480 V/ 50-60 Hz/2 x 80-160 A	2 x 45-80 kW/380-480 V/ 50-60 Hz/2 x 80-160 A

Your dealer:



**GEDA-Dechentreiter
GmbH & Co. KG**

Mertinger Straße 60
86663 Asbach-Bäumenheim
Phone +49 (0) 906 9809-0
Fax +49 (0) 906 9809-50
info@geda.de
www.geda.de