


	1300 kg trifase	EHM
👤	+1200 kg	EHPM
👤👤	+1100 kg	
👤👤👤	+1000 kg	
👤👤👤👤	+900 kg	
👤👤👤👤👤	+800 kg	
👤👤👤👤👤👤	+700 kg	
👤👤👤👤👤👤👤	+600 kg	
👤👤👤👤👤👤👤👤	+500 kg	


PIATTAFORMA DI TRASPORTO / MONTACARICHI
TRANSPORT PLATFORM / MATERIAL HOIST

Dati tecnici	Technical Data	Données Techniques	Datos Tecnicos	EHPM 2500/10 trifase	EHM 2500/10 trifase
Capacità con limitatore di carico	Capacity with overload system	Charge avec limiteur de charge	Capacidad con limitador de carga	1500 kg	1500 kg
Velocità di sollevamento	Lifting speed	Vitesse de lévage	Velocidad de elevación	12 m/min	20 m/min
Massima altezza ancorata	Max anchored height	Hauter max avec ancrages	Altura max con anclajes	160 m	160 m
Dimensioni interne cesta	Platform dimensions	Dimensions du plancher	Dimensiones de cabina	3,08 x 1,64 m	3,08 x 1,64 m
Tensione alimentazione	Input power range	Tension d'alimentation	Tensión de red	380/415 V 50/60 Hz	380/415 V 50/60 Hz
Interruttore protezione linea	Protection switch	Interrupteur de protection	Interruptor de protección	25 A	32 A
Potenza servizio continuo	Power of the motors	Puissance des moteurs	Potencia de motorreductores	2 x 3 kW	2 x 4 kW
Corrente di spunto	Starting current	Ampérage au démarrage	Intensidad de arranque	90 A	130 A
Minima potenza di linea consigliata	Minimum line power suggested	Min. puissance de ligne conseillée	Min. potencia de linea	10 kW	12 kW

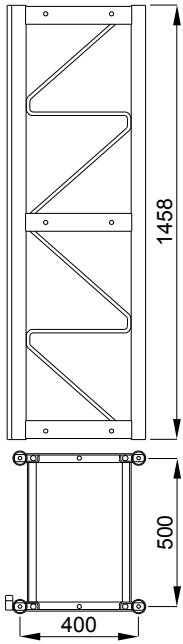


Compatibile con:
Interchangeability:


- EHM 2500/15
- EHM 2500/25
- EHM 2500/35
- EHPM 2500/15
- EHPM 2500/25
- EHPM 2500/35
- EHP 1200
- EHP 1500

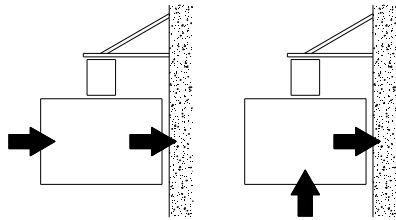


Configurazioni d'accesso possibili
Possible access configurations

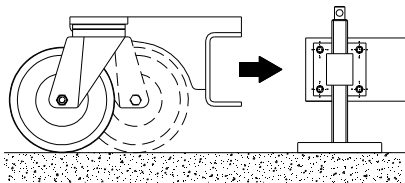

Kit ruote pivotanti
per movimentazione a terra
*Rotating wheel kit
for quick positioning*



Quattro vitoni di livellamento
Four levelling screw-jacks

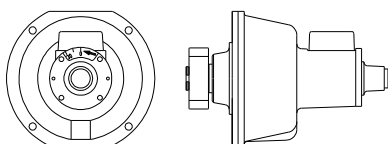

Freno d'emergenza
ad arresto progressivo
*Overspeed safety device
with progressive stop*

